



SECTION B-B

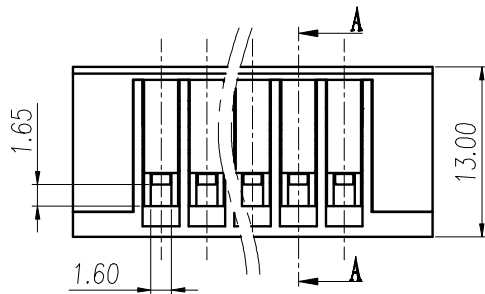

SECTION A-A

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
1	初版发行		

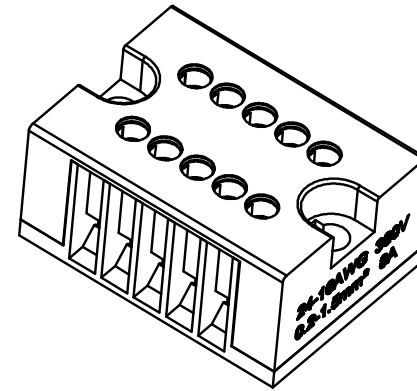

技术要求:

极数: 组装

额定电压: 380V

额定电流: 8A

螺丝类型/扭力: M2/4kgf.cm

绝缘材料类型: PA66

阻燃等级: V0

线径: 0.2-1.5mm<sup>2</sup>

5	H3800导电件	4020B0001AV	P	黄铜	镀镍		
4	LC1-3.81-铜方块	F1A0BLC3813V	2P	黄铜	镀镍		
3	LC1-3.81-螺丝(一字平头)	SPOYA204801V	2P	碳钢	三价铬钝化彩锌		
2	H3800-盖板	4020C0YXXAV	1	PA66-V0			
1	H3800-本体	4020A0YXXAV	1	PA66-V0			
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES		
DES.	WY	DATE	2019/12/27	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-1-H380150
<b>上海有乐电气有限公司</b> Shanghai Youle Electric Co., Ltd.						TITLE	H3800-XXP-1Y-00A
							H3800-成品

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10