
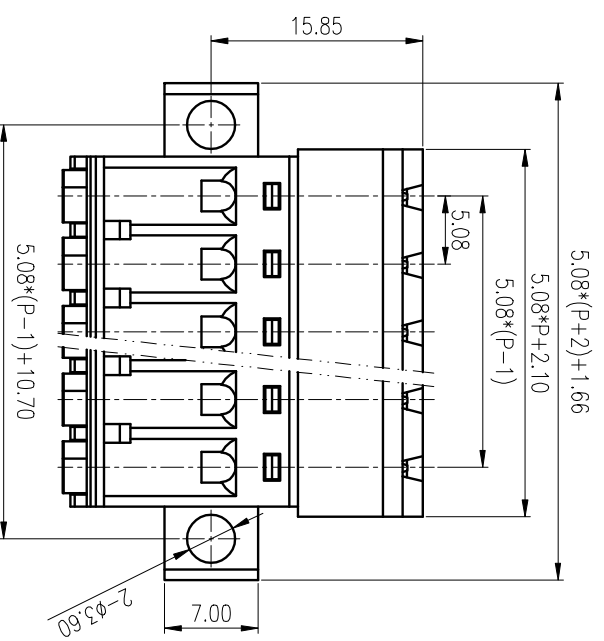


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

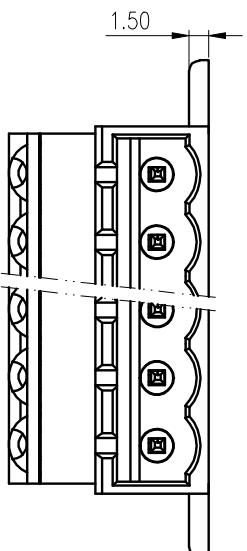

- NOTES1:**
UL Standard:
 1.Voltage Rating: 300V, Current Rating: 10A
 2.Suitable Electric Wire: 26-12AWG
IEC Standard:
 1.Voltage Rating: 400V, Current Rating: 15A
 2.Suitable Electric Wire: 24-12AWG

- NOTES2:**
 1.Pitch : 5.08mm
 2.Withstand Voltage : AC2500V for 1 minute
 3. Insulation Resistance : 500MΩ / DC500V
 4. Using Temperature Range : - 40℃ ~ + 105℃

技术要求1:

- UL 标准:**
 1. 额定电压: 300V, 额定电流: 10A
 2. 适用线规: 26~12AWG
IEC 标准:
 1. 额定电压: 400V, 额定电流: 15A
 2. 适用线规: 24~12AWG

技术要求2:

1. 间距: 5.08mm
 2. 耐电压值: AC2500V/min
 3. 绝缘阻抗: 500MΩ/DC500V
 4. 使用条件: -40℃~+105℃

	pitch dimension		Nominal dimension						Tolerance		
	over	to	over	to	over	to	over	to			
variable range	0	6	6	10	0	30	30	60	100	150	—
	±0.1	±0.15	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	—

NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
5	LC60-5.08五金件	2083B0001AY	P	磷青铜	镀锡
4	LC6-5.08-弹片	P2A0DL658BY	P	不锈钢	
3	LC6-5.08-接钮	1020D0Y01AY	P	PA66-Y0	
2	LC60-5.08-盖板	2083C0YXXAY	1	PA66-Y0	
1	LC60N-5.08-本体	2084A0YXXAY	1	PA66-Y0	

DES.	WY	DATE	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
		2021/07/12	A4			1 of 1
CHK		DATE	SCALE			REV: Y0
APP.		DATE	1:1			



上海有乐电气有限公司
 Shanghai Youle Electric Co., Ltd

TTITLE	DWG NO.	REV: Y0
	LC60N-5.08-XP-1Y-00A	
	LC60N-5.08-成品	