
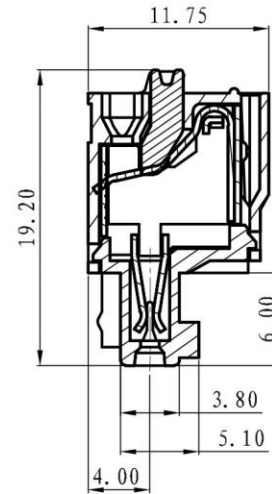

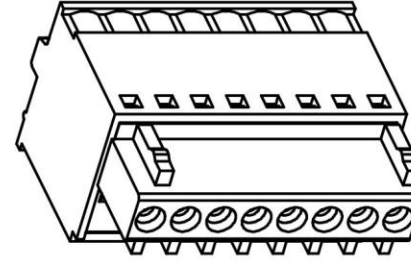
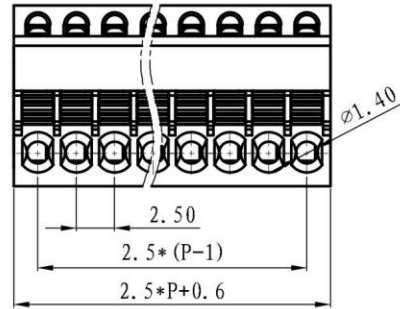


| REVISION RECORD | | | |
|-----------------|---------|------|------|
| REV. | CONTENT | MOD. | DATE |
| △ | 初版发行 | | |

NOTES:
 Pitch : 2.5mm
 Rated Voltage : 150 V
 Rated Current : 4A
 Withstand Voltage :
 AC2000V for 1 minute
 Insulation Resistance :
 5MΩ / DC500V
 Using Temperature Range :
 - 40℃ ~ + 105℃
 Wire range :24 ~20 AWG
 Stripping length : 10mm

技术要求:
 间距: 2.5mm
 额定电压: 150V
 额定电流: 4A
 耐电压值: AC2000V/min
 绝缘阻抗: 5MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 24~20 AWG
 剥线长度: 10mm

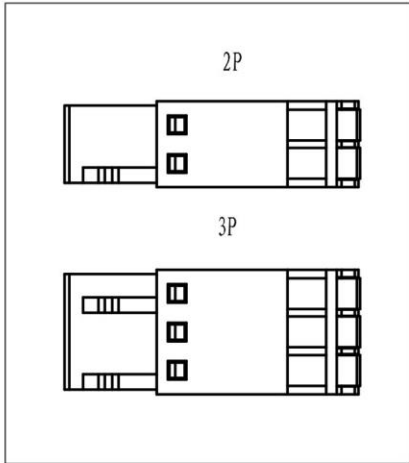

| | pitch dimension | | | Nominal dimension | | | | | — ▱ ⌒ |
|----------------|-----------------|--------------|---------------|-------------------|---------------|----------------|-----------------|----------|-------------|
| | over 0 to 6 | over 6 to 10 | over 10 to 24 | over 0 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 150 | over 150 | |
| variable range | 0 to 6 | 6 to 10 | 10 to 24 | 0 to 30 | 30 to 60 | 60 to 100 | 100 to 150 | 150 | |
| Tolerance | ±0.1 | ±0.15 | ±0.25 | ±0.2 | ±0.3 | ±0.5 | ±0.7 | ±1.0 | 0.05/10 |

| 5 | LC6-2.5-弹片 | F2A0DLC625BV | P | 不锈钢 | |
|------|--------------|--------------|----------|----------|--------------------|
| 4 | LC6-2.5-夹子 | 1023B0001AV | P | 黄铜 | 镀镍 |
| 3 | LC6-2.5-按钮 | 1023D0YXXAV | P | PA66 | |
| 2 | LC6-2.5-盖板 | 1023C0YXXAV | 1 | PA66 | |
| 1 | LC6-2.5-主体 | 1023A0YXXAV | 1 | PA66 | |
| NO. | NAME OF PART | NO. OF PART | Q'TY | MATERIAL | NOTES |
| DES. | ARKINE | DATE | 12-02-23 | UNITS | mm |
| CHK. | | DATE | | SIZE | A4 |
| APP. | | DATE | | SCALE | 1:1 |
| | | | | DWG NO. | SP-2-1023001 |
| | | | | REV: | V0 |
| | | | | TITLE | LC6-2.5-XXP-1Y-00A |
| | | | | | LC6-2.5-成品 |

上海有乐电气有限公司
 ShanghaiYouLeElectric CO.,LTD