


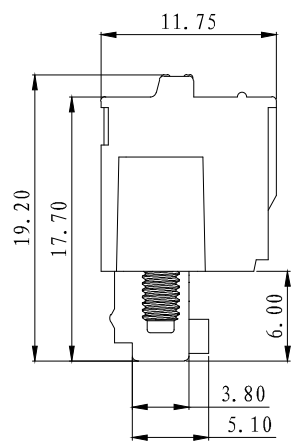


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

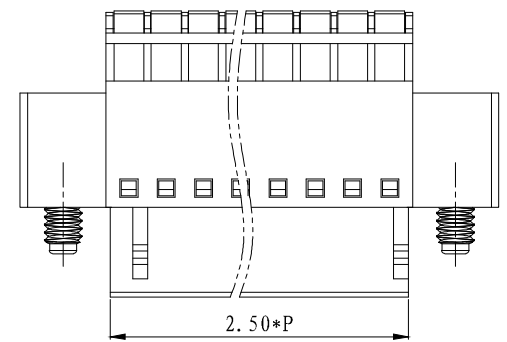


2P

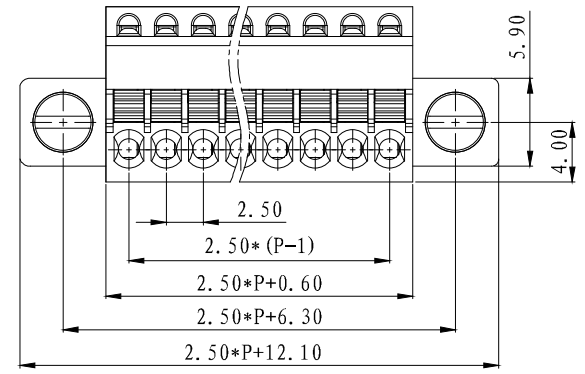

NOTES:
 Pitch : 2.5mm
 Rated Voltage : 150 V
 Rated Current : 4A
 Withstand Voltage :
 AC2000V for 1 minute
 Insulation Resistance :
 500MΩ / DC500V
 Using Temperature Range :
 -40℃ ~ +105℃
 Wire range :24 ~20 AWG


技术要求:
 间距: 2.5mm
 额定电压: 150V
 额定电流: 4A
 耐电压值: AC2000V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 24~20 AWG



3P

	pitch dimension			Nominal dimension					— ▭ ○
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LC1-耳朵螺丝	SPOYA255101V	2	碳钢	三价铬钝化彩锌
5	LC6-2.5-弹片	F2A0DLC625BV	P	不锈钢	
4	LC6-2.5-夹子	1023B0001AV	P	黄铜	镀镍
3	LC6-2.5-按钮	1023D0YXXAV	P	POM	
2	LC6-2.5-盖板	1023C0YXXAV	1	PA66	
1	LC6M-2.5-主体	1023M0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	WY	DATE	23-08-12	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-1023001
				REV:	V0
				TITLE	LC6M-2.5-XXP-1Y-00A
					LC6M-2.5-成品

 上海有乐电气有限公司
 Shanghai YouLe Electric CO., LTD