
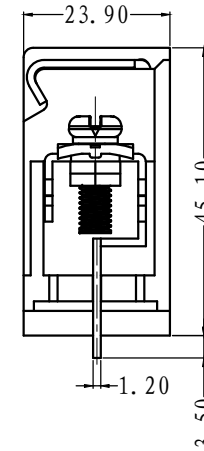
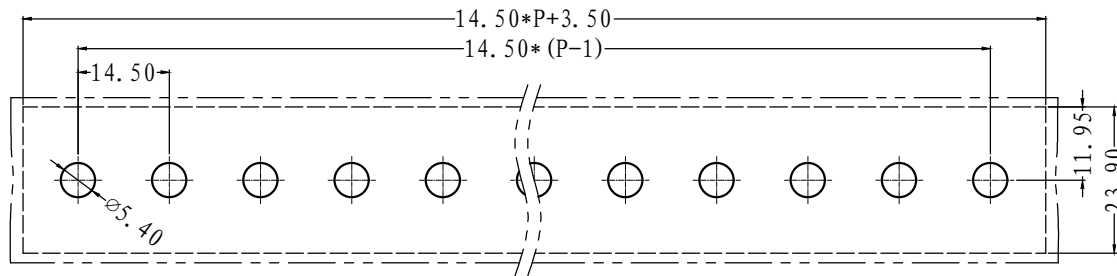
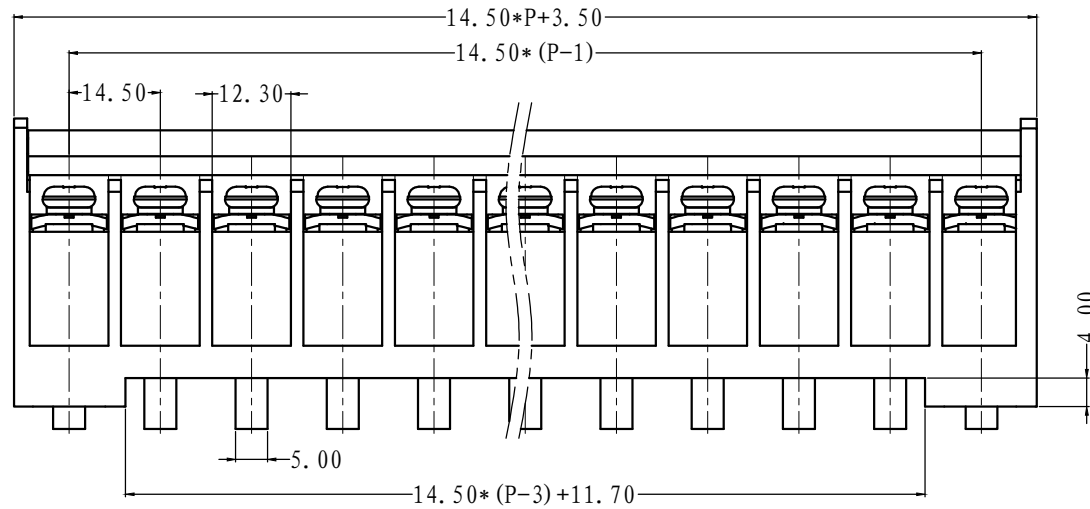


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

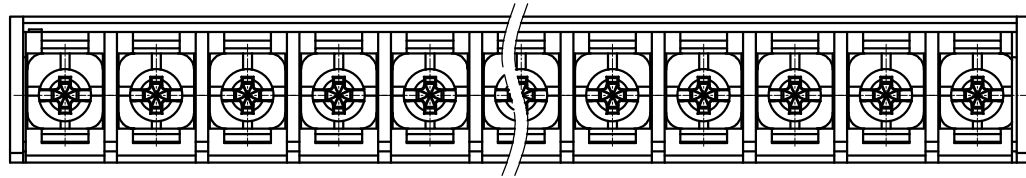

NOTES:

- Pitch : 14.5mm
- Rated Voltage : 600V
- Rated Current : 40 A
- Withstand Voltage : AC3000V for 1 minute
- Insulation Resistance : 1000MΩ / DC1000V
- Using Temperature Range : -40°C ~ +130°C
- Screw Torque Value : 2.0Nm

技术要求:

- 间距: 14.5mm
- 额定电压: 600V
- 额定电流: 40A
- 耐电压值: AC3000V/min
- 绝缘阻抗: 1000MΩ/DC1000V
- 使用条件: -40°C~+130°C
- 螺丝扭矩: 2.0Nm

	pitch dimension			Nominal dimension					— ◇ ○
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	外六角螺母	SM00A500001V	1	铁	镀锌	
3	GB1450-螺丝	SPFFA808093V	P	碳钢	镀锌	
2	GB1450-焊脚	2526B0001AV	P	黄铜	镀雾锡	
1	GB1450-14.5-XXP-主体	2526A30XXAV	1	PBT	黑色	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES	
DES.	WL	DATE	18-09-28	UNITS	MM	
CHK.	DATE	SIZE	A4	THIRD ANGLE PROJECTION		
APP.	DATE	SCALE	1:1	DWG NO.	SP-1-DB1450	
<b>上海有乐电气有限公司</b> Shanghai YouLe Electric Co., LTD				TITLE	GB1450-14.5-XXP-1Y-00A GB1450-14.5-成品	
					SHEET	1 of 1
					REV: V0	