

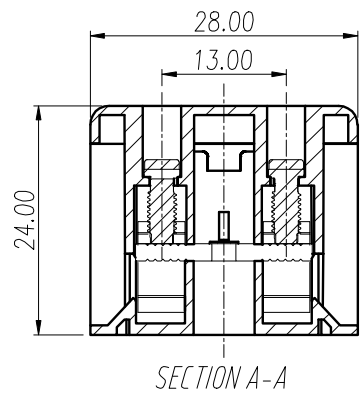
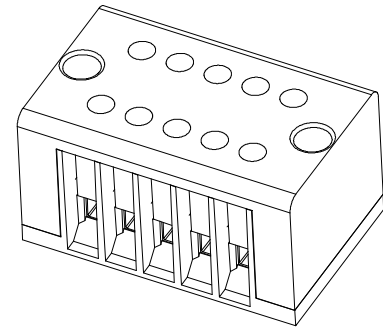


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

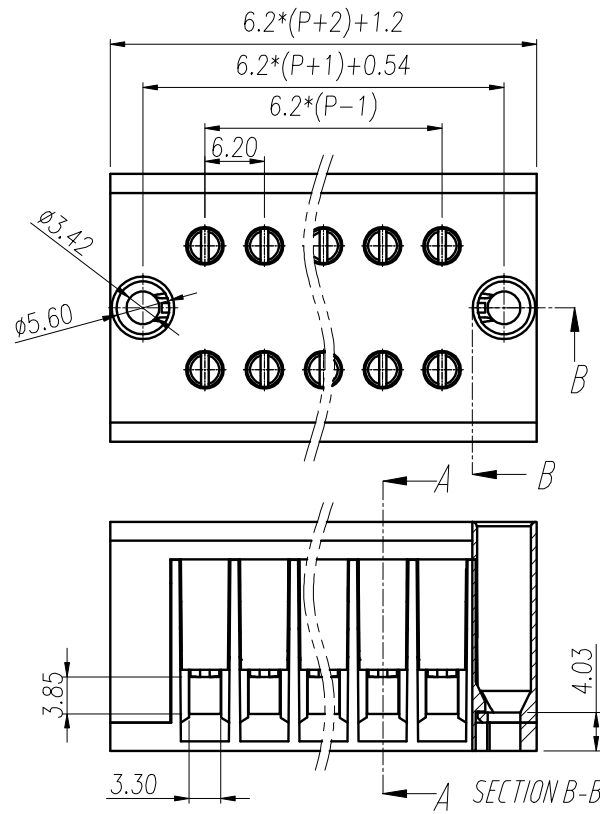

技术要求:
极数: 组装
额定电压: 600V
额定电流: 20-41A
螺钉类型/扭力: M3/0.6N.m
绝缘材料类型: PA66
阻燃等级: V0
线径: 0.2-4mm²



5	H3803导电件	6H38B00041AV	P	紫铜	镀镍		
4	UK5N-铜方块	F000000140V	2P	黄铜	镀镍		
3	UK2.5B-螺丝	SSM0300070V	2P	合金钢	镀镍		
2	H3803-盖板	4017C0YXXAV	1	PA66-V0			
1	H3803-本体	4017A0YXXAV	1	PA66-V0			
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES		
DES.	HH	DATE	2019/09/29	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-1-H380350
上海有乐电气有限公司 Shanghai Youle Electric C O.,LTD						TITLE	H3803-XXP-1Y-00A
							H3803-成品

	pitch dimension			Nominal dimension					— —
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10