

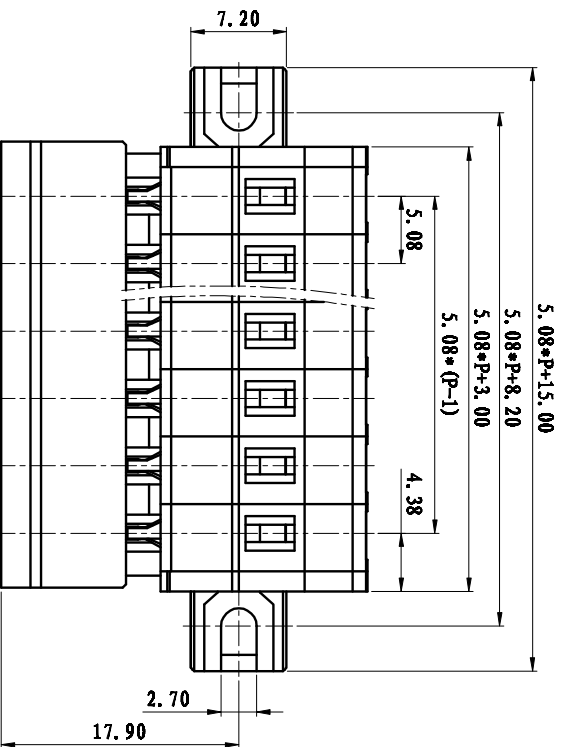


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

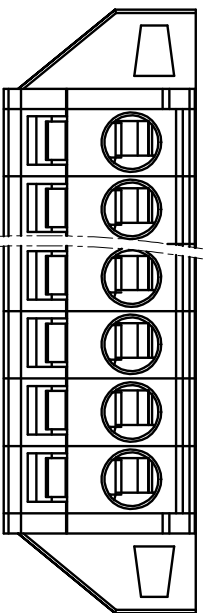

NOTES:
 Pitch: 5.08mm
 Rated Voltage: 300 V
 Rated Current: 15 A
 Withstand Voltage: AC2500V for 1 minute
 Insulation Resistance: 500MΩ / DC500V
 Using Temperature Range: -40°C ~ +105°C
 Wire range: 22~14AWG

技术要求:
 间距: 5.08mm
 额定电压: 300V
 额定电流: 15A
 耐压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40°C~+105°C
 适用线规: 22~14AWG

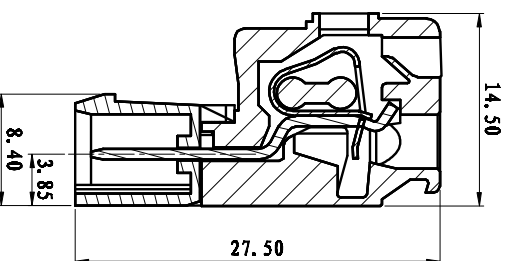

	pitch dimension			Nominal dimension				
	over	over	over	over	over	over	over	over
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150 to
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

6	LSC10-方针	1062B0001AY	P	黄铜	镀雾锡
5	LSC1-薄片	F2ANDLSL1BW	P	不锈钢	
4	LSZ10-5-08-主体	1086A0YXXAY	1	PA66	
3	LSC10M-5-08-盖板2	1064C0Y01AY	1	PA66	
2	LSC10M-5-08-盖板1	1063C0Y01AY	1	PA66	
1	LSC10-5-08-本体	1062A0Y01AY	P	PA66	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	LDD	DATE	12/08/15	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-1060003
				TITLE	LSZ10M-5-08-XTP-1T-00A
					LSZ10M-5-08-成品

上海有乐电气有限公司
 Shanghai Youle Electric CO.,LTD